

# Borough of Penbrook



150 South 28th Street Penbrook, Pennsylvania 17103 - 1996  
Telephone 717.232.3733 FAX 717.233.8589

## Street Cut Permit Application \$75.00 Fee Per Cut

### Permittee Information

Applicant Company Name: \_\_\_\_\_ Contact Person: \_\_\_\_\_

Address: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_ E-mail: \_\_\_\_\_

24 Hour Emergency Phone (if different from above): \_\_\_\_\_

### Street Cut Information

Work Location: \_\_\_\_\_

Parcel Number \_\_\_\_\_

Cut will be in street:  \_\_\_ ft. long, \_\_\_ ft. wide \_\_\_ ft. deep Distance to nearest intersection \_\_\_\_\_

Sidewalk:  \_\_\_ ft. long, \_\_\_ ft. wide \_\_\_ ft. deep Street \_\_\_\_\_

Work Description: \_\_\_ Sewer \_\_\_ Gas \_\_\_ Water \_\_\_ Electric  \_\_\_ Lateral \_\_\_ Main

Estimated Start Date/Time: \_\_\_\_\_ PA One Call Serial Number: \_\_\_\_\_

Bond Number: \_\_\_\_\_ Bond Expiration Date: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_




\_\_\_\_\_

\_\_\_\_\_

Building Permit Number: \_\_\_\_\_

### Additional Plan Requirements

Traffic Control: A traffic control plan is required for all work within the Borough. All plans shall comply with the Department of Transportation, Commonwealth of Pennsylvania, pertaining to Work Zone Traffic Control, 67 Pa. C.S.A. Code, Chapter 203 as amended.

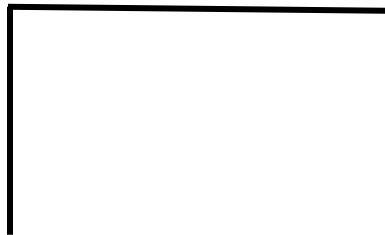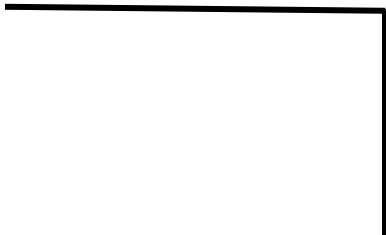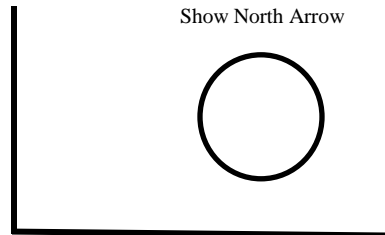

It shall be the duty of any person, firm, partnership or corporation causing an opening or excavating in the cartway, to sawcut the existing cartway in a straight and uniform manner 12 inches back from the edge of the trench or 12 inches from the face of the curb or structure and completely remove all existing backfill and earth and restore the cartway as follows.

1. 2A stone: Machine tamped and compacted in layers not to exceed 6 inches to within 6 inches of the cartway grade.
2. Five inches of bituminous concrete base course, machine tamped and compacted;
3. One inch of superpave wearing course, machine tamped and compacted, and
4. Sealing around the edges of the trench or between the curb and the replaced cartway with AC-20.

All work shall be done in a good workmanship like manner and shall not cause any ridges or depressions. All work and materials shall be in accordance with PennDOT form 408 or as approved by the Borough Engineer.

Applicant Signature \_\_\_\_\_ Date: \_\_\_\_\_

(for office use only) Permit #SC-\_\_\_\_\_